




29007 477th Avenue 500 Whirlwind Drive
Canton, SD 57013 Freeport, MN 56331
OFFICE: 866-987-9080

WWW.DAKOTASTEELANDTRIM.COM
Email: Quotes@dakotasteelandtrim.com

CONTINUOUS - RIB -

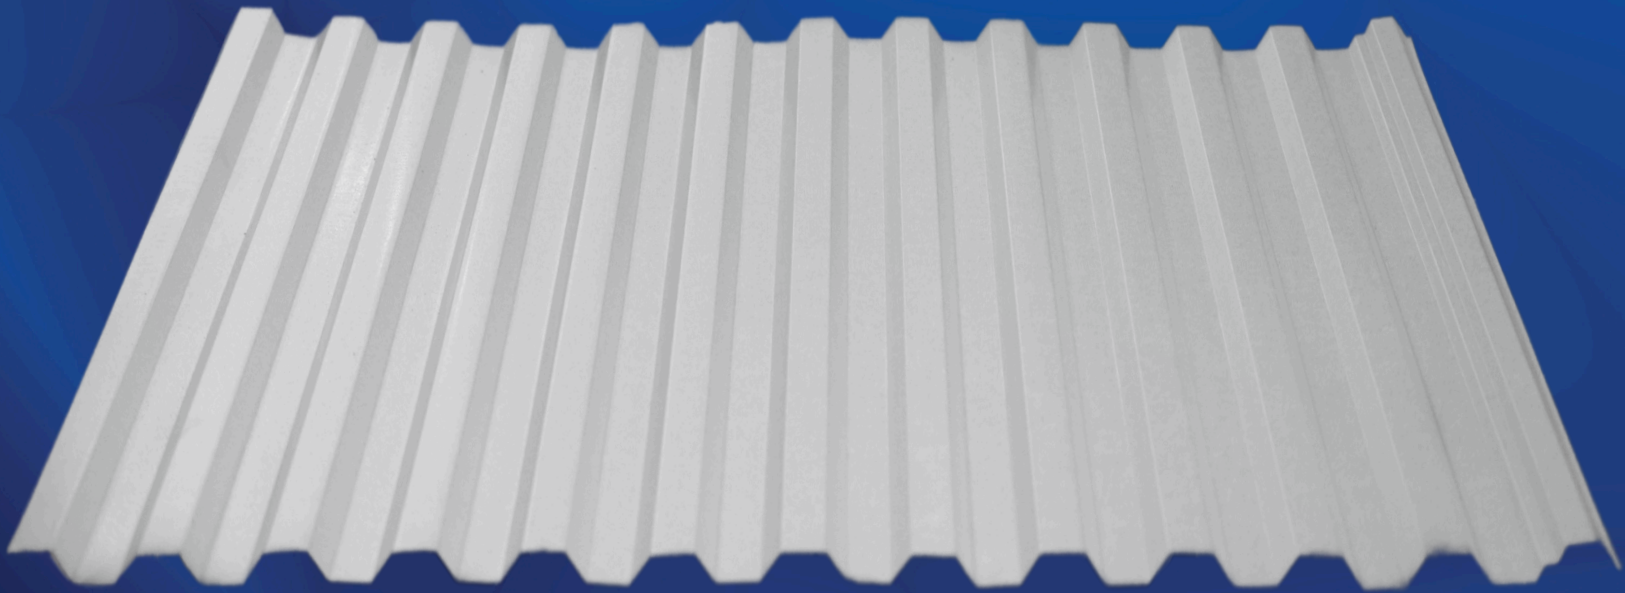

SPECIFICATIONS:

- Panel coverage - 36"
- Minimum recommended slope - 3:12
- Available Gauges - 29 ga. and 26 ga.
- Painted Product carries up to a 45 year warranty using MAXX Shield 45 Paint System

PANEL INFORMATION:

- Panel has a 36" coverage, with 1/2" high ribs 3" on center.
- Maximum recommended panel length is 45' - 0".
- Panel can be used over open framing, or solid substrate.

TESTING:

- UL 790, Class A Fire Resistance Rating
- UL 2218, Class 4 Impact Resistance
- UL 580, Class 90 Wind Uplift Rating

1 Clear Coat

Final Color and Protection Layer

2 Paint Layer

Adhesion and Corrosion Resistance

3 Zinc Phosphate

The best coating to provide resistance to chalking & fading

4 Zinc Coating

Prevents rust, extends roof lifespan

8 Backer Coat

Protective layer for bottom side corrosion protection

5 Metal Substrate

Structural Steel Base

6 Zinc Phosphate

Corrosion Protection Layer

7 Base Coat

Intermediate Protective Layer



45 YEAR WARRANTY



Scan The QR Code For Colors



36" COVERAGE

Notes:

- allowable loads are based on uniform span lengths, t-.015", Fy = 80 KSI but reduced to 60 KSI for design per AISI.
- LIVE LOAD is limited by bending, shear, combined shear & bending and web crippling and deflection of L/180.
- NEGATIVE WIND LOAD is limited by bending, shear, combined shear and bending and deflection of L/180.
- Negative WIND LOAD Deflection has been increased 30% per IBC 2003 Table 1604.3.
- NEGATIVE WIND LOAD does not consider fastener pullout or pullover.
- The weight of the panel has not been deducted from the allowable loads.

