




29007 477th Avenue 500 Whirlwind Drive
Canton, SD 57013 Freeport, MN 56331

OFFICE: 866-987-9080

WWW.DAKOTASTEELANDTRIM.COM

Email: Quotes@dakotasteelandtrim.com

STANDING SEAM

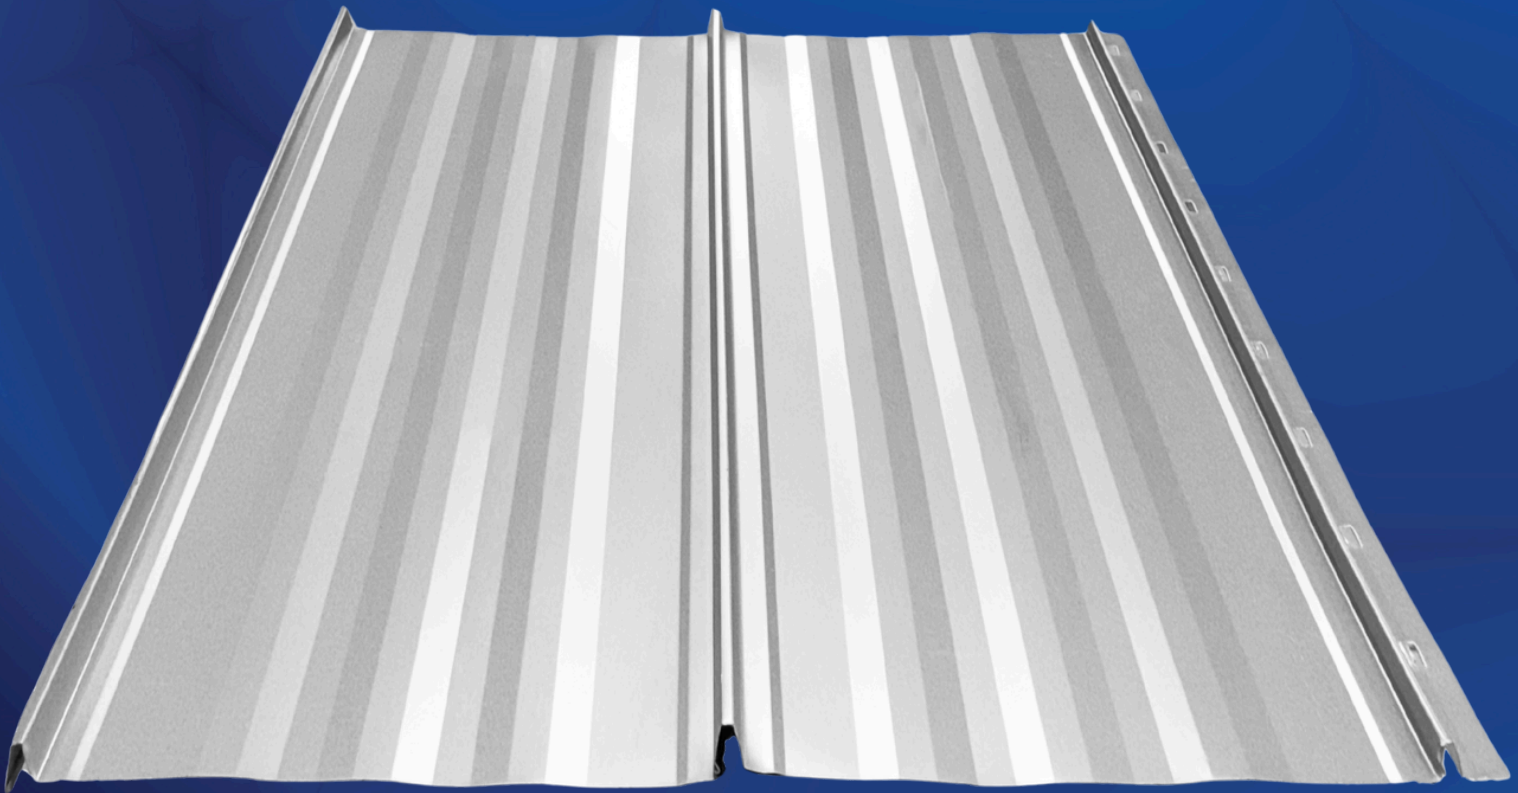

SPECIFICATIONS:

- Panel coverage - 12" or 16"
- Minimum recommended slope - 3:12
- Available in 26 gauge
- Painted Product carries up to a 45-year warranty using MAXX Shield 45 Paint System



PANEL INFORMATION:

- Panel has a 12" or 16" coverage, with 1" high ribs.
- Maximum recommended panel length is 40' - 0".
- Panel to be used over solid substrate.



TESTING:

- UL 790, Class A Fire Resistance Rating
- UL 2218, Class 4 Impact Resistance
- UL 580, Class 90 Wind Uplift Rating

Foldable Tabs and Notching Available!

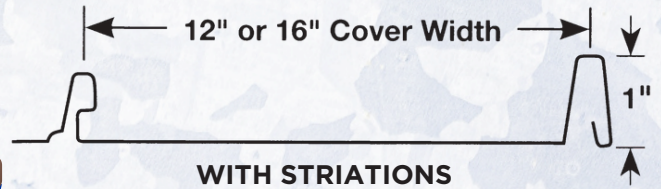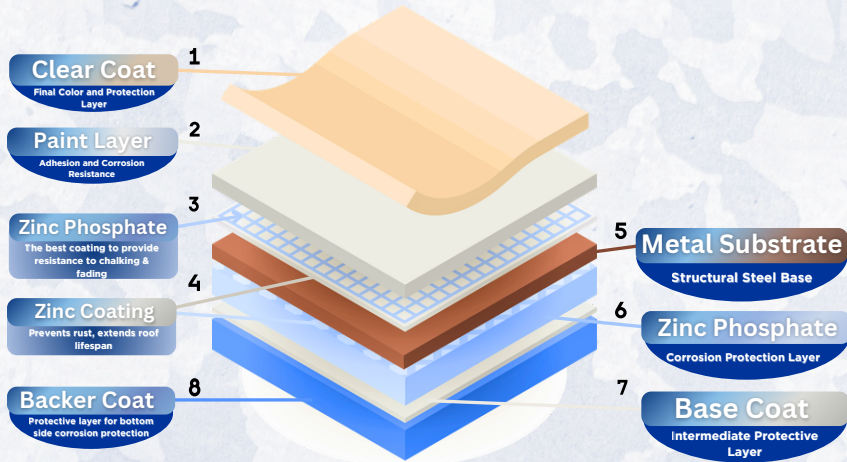

45 YEAR WARRANTY

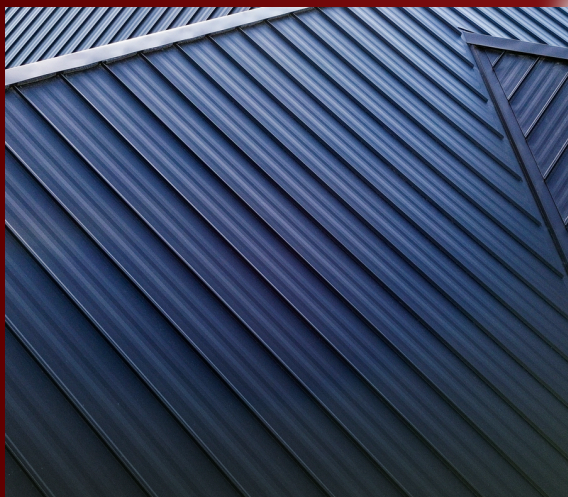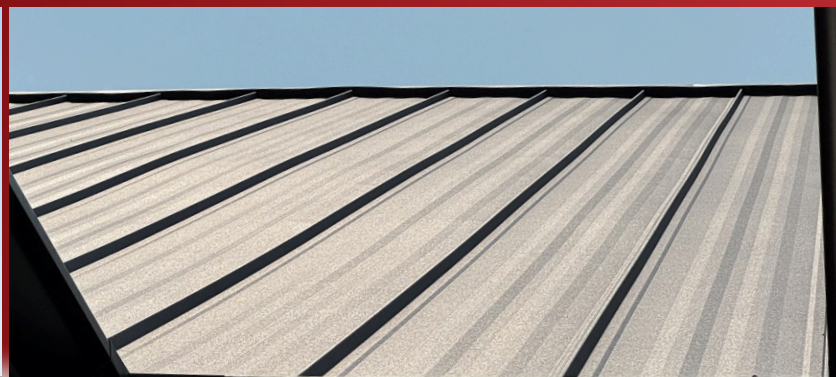

Scan The QR Code For Colors



AVAILABLE NOW ON

